


## FNA-A9 / RXM-A

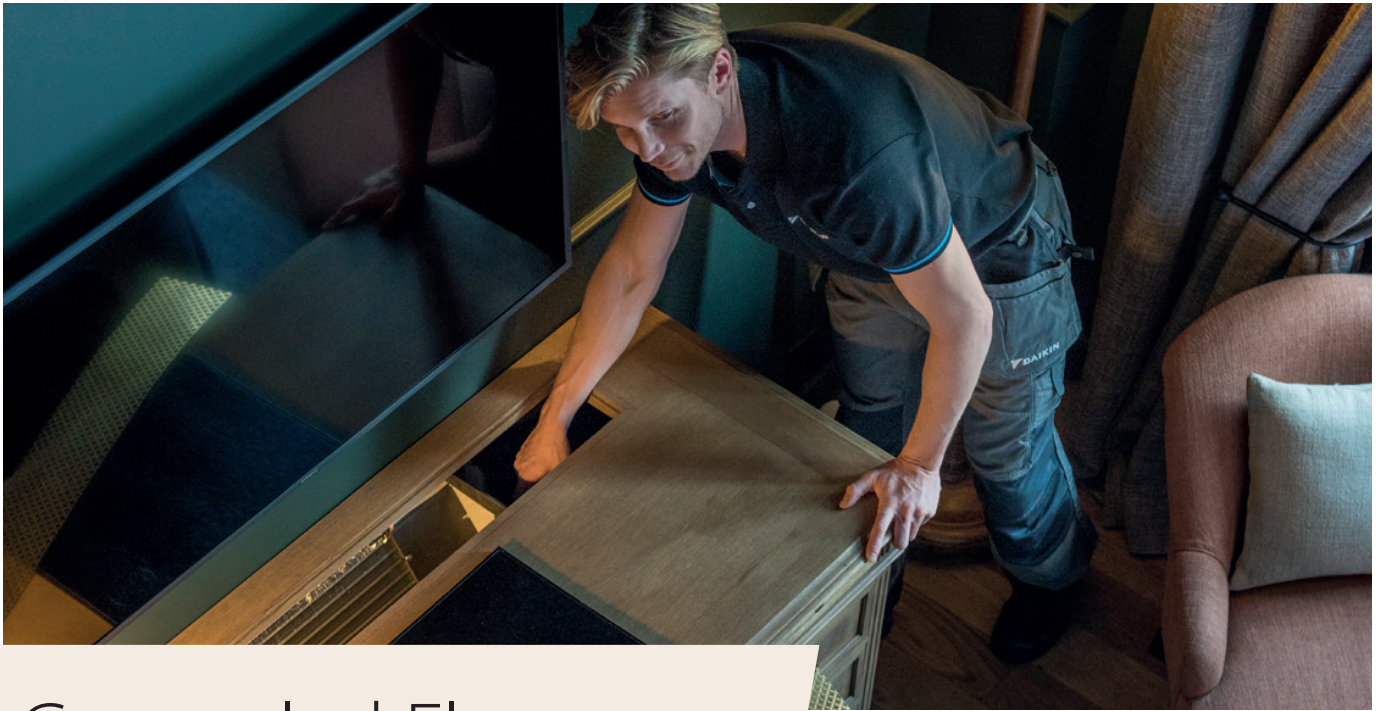

# Concealed Floor Standing

Discreet, efficient comfort

The FNA-A9 floor-mounted ducted units deliver quiet, hidden comfort for modern homes. Designed to fit neatly into cupboards or low-level spaces, they provide powerful heating and cooling without visible wall units. The result is a clean interior look with even, whole-room comfort.

### Comfort that fits your home

Designed to run quietly, selectable night and silent modes help keep your home peaceful, even during sleep. Its slim design and flexible ducting allow comfortable airflow without affecting your room layout or interior style.

### Smart energy savings

Daikin's inverter technology automatically matches output to your home's needs, helping reduce energy use while maintaining steady comfort. Economy Mode further lowers running costs, making efficient heating and cooling effortless.

### Efficient control, even when you're out


Home Leave Operation helps save energy when rooms are unoccupied, maintaining gentle background comfort. Optional Wi-Fi control via the Daikin Onecta App lets you adjust temperatures remotely, so your home is always comfortable when you return.

### Reliable comfort throughout your home

Powerful airflow supports flexible duct layouts, helping deliver even temperatures across different rooms. This makes it ideal for discreet, built-in installations that maintain consistent comfort.

### Flexible installation for modern living

Compact and easy to integrate, the FNA is designed to fit neatly under windows, inside radiator covers, or within wall spaces. This allows homeowners to enjoy hidden comfort without compromising on room design or usable space.



FNA-A9



RXM60A



# FNA-A9 / RXM-A

**R-32** BLUEEVOLUTION

Indoor Units			FNA25A9	FNA35A9	FNA50A9	FNA60A9
Capacity	UK Total Cooling	kW	2.54	3.32	4.89	5.86
	UK Sensible Cooling	kW	1.89	2.26	3.66	4.11
	Nominal Cooling	kW	2.6	3.4	5.0	6.0
	Nominal Heating	kW	3.2	4.0	5.8	7.0
Seasonal Efficiency (EN14825) COOLING	Energy Label		A+	A+	A+	A
	Pdesign	kW	2.6	3.4	5.0	6.0
	SEER		5.76	5.76	5.7	5.56
	Annual Energy Consumption	kWh	158	207	307	378
Seasonal Efficiency (EN14825) HEATING	Energy Label		A+	A+	A+	A+
	Pdesign	kW	2.8	2.9	4.0	4.6
	SCOP		4.37	4.22	4.05	4.16
	Annual Energy Consumption	kWh	913	978	1383	1547
Air Flow Rate (Cooling)	High / Nom / Low	m <sup>3</sup> /min	8.7 / 8.0 / 7.3	8.7 / 8.0 / 7.3	16.0 / 14.8 / 13.5	16.0 / 14.8 / 13.5
External Static Pressure Dimensions	High / Nom	Pa	48/30	48/30	49/40	49/40
	Height	mm	620	620	620	620
	Width	mm	790	790	1190	1190
	Depth	mm	200	200	200	200
Weight		kg	23	23	30	30
Sound Pressure (Cooling)	High / Med / Low	dBA	33 / 31 / 28	33 / 31 / 28	36 / 33 / 30	36 / 33 / 30
Sound Pressure (Heating)	High / Med / Low	dBA	33 / 31 / 28	33 / 31 / 28	36 / 33 / 30	36 / 33 / 30
Sound Power (Cooling)		dBA	53	53	56	56

Outdoor Units			RXM25A9	RXM35A9	RXM50A8	RXM60A
Dimensions	Height x Width x Depth	mm	610 x 923 x 367	610 x 923 x 367	610 x 923 x 367	734 x 954 x 401
Weight		kg	36	36	40	49
Electrical Details	Power Supply		1ph	1ph	1ph	1ph
	Maximum Input Current (MCA) A		10.92	10.92	12.69	14.76
	Max Fuse Size	A	13	13	13	16
Interconnection Wiring	Core / Cable Size		3+E / 1.5	3+E / 1.5	3+E / 1.5	3+E / 1.5
Piping Connections	Liquid / Gas	inches (mm)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 3/8 (9.5)	1/4 (6.4) / 1/2 (12.7)	1/4 (6.4) / 1/2 (12.7)
Pipework	Maximum Length	m	20	20	30	30
	Maximum Vertical Rise	m	15	15	20	20
	Precharged to	m	10	10	10	10
	Additional charge	g/m	20	20	20	20
	Holding charge	kg	0.95	0.95	0.95	1.15
Sound Pressure (Cooling)	Nominal	dBA	47	47	48	48
Sound Pressure (Heating)	Nominal	dBA	49	49	49	49
Sound Power (Cooling)		dBA	58	58	61	63
Operating Range (Cooling)	Min / Max	°CDB	-10 / 50	-10 / 50	-10 / 50	-10 / 50
Operating Range (Heating)	Min / Max	°CWB	-21 / 18	-21 / 18	-21 / 18	-21 / 18
Air Flow Rate (Cooling)	Nominal	m <sup>3</sup> /min	39.1	39.1	58.0	46.6

## Notes & Features:

- > All fan coils supplied as standard with air filter
- > FNA-A supplied with 100mm high legs for optional mounting
- > Requires very little installation space
- > Low height makes it ideal for installation beneath windows

## Accessories:

Accessory Ref	Description
BRC1H52W7	Wired touch screen remote controller - White
BRC1H52S7	Wired touch screen remote controller - Silver
BRC1H52K7	Wired touch screen remote controller - Black
BRP069C81	Wi-Fi adapter for use with Daikin ONECTA App
BRC4C65	Wireless remote controller
K.RSS	Wireless room mounted temperature sensor and receiver
KLIC-DL_V2	KNX Interface for Sky Air and VRV systems
KRCS01-4	Remote room mounted temperature sensor
KRP4A53 and UK.FB2	Unit/group adaptor PCB for remote on/off, status indication and temperature setting

Accessory Ref	Description
RS-SE	Service and configuration tool for K.RSS
RTD-10 and UK.FB2	Enhanced function PCB for Sky Air and VRV. Duty rotation, Lead Lag control and heating interlock
RTD-20 and UK.FB2	Energy control PCB for Sky Air and VRV
EKM BPP1A and UK.FB2	Modbus interface PCB for Sky Air and VRV
K.CGM	Condensing Unit Guard (1150 x 1150 x 650)
K.CWB90-2	Wall bracket (90kg, 500mm support arm)
K.DT1	Condensate drip tray for use with K.CWB90-2
K.FF6005	Two flexi-feet (Standard 600mm x 185mm x 100mm) to mount the outdoor unit

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)